




MAIN CHARACTERISTICS


High-performance suspended LED luminaire for industrial use and large halls.

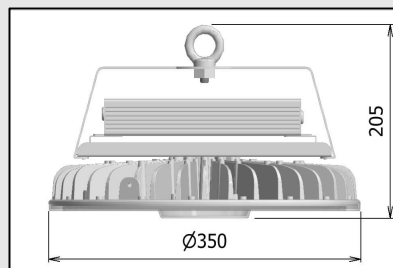

STANDARD VERSION

CCT	4 000 K
CRI	Ra>80
Ingress protection	IP66, approved for normal operation within a relative humidity range of 10-90%
Impact protection	IK10
Power factor	≥ 0,97
Luminous efficiency	≥ 88%
Ta (Ambient temperature)	Up to 35 °C
Efficiency	Luminaire: up to 148 lm/W (for CCT 4000 K) LED: up to 162 lm/W (for CCT 4000 K)
Lifespan (LED)	L90>60 000 hours
Ballast life	>50 000 hours
Housing	Aluminium casting
Body surface finish	Powder coating
Colour	RAL 9005
Rated voltage	100-305 VAC
Electrical protection	Overcurrent protection, against short circuit, overvoltage, and overheating
Protection class	Class I
Luminaire cover	Polycarbonate
Fixture mounting	Suspension eye
Weight	5,5 Kg
Luminaire design	Equipped with a pressure equalization vent Separate ballast and optical part of the luminaire

OPTICAL SYSTEM

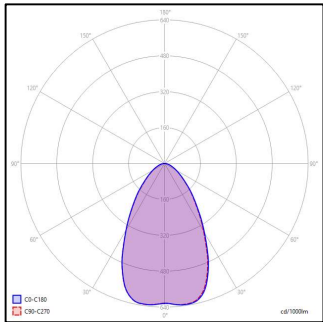Optical system	A60
	

MODIFICATION OPTIONS

CCT	5 000 K
CRI	Ra>90
Power range	86-191 W
Ta (Ambient temperature)	Up to 50 °C
Controls and connectivity	DALI
QR code	Possibility of applying a QR code with a technical parameters of the luminaire
Optical system	Optics 90°